



Electrolux

Service Trolleys Heated Banquet Trolley - 20x2/1 GN

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



351157 (BT2021H)

Heated banquet trolley
20x2/1GN

Short Form Specification

Item No. _____

Constructed in double-walled, 304 AISI stainless steel with expanded polyurethane insulated panels. Ergonomic handles for easy movement. 304 AISI stainless steel grids capable of holding GN 2/1 and GN 1/1 containers or plates. Temperature can be set from 30°C to 90°C with digital display. Humidity can be added inside the chamber to keep food from drying. N. 2 fixed castors and N. 2 swiveling castors with brakes, mm125 in diameter. Full perimeter bumpers for added shock protection. By using the optional eutectic plates it is possible to keep dishes at a temperature of +5°C for about two hours. Load capacity: 340 Kg.

APPROVAL: _____

Main Features

- Temperature set-up from +30°C to +90°C, monitored through the digital display, allows to adjust temperature to the specific requirements of the hot dishes.
- Trolley reaches set temperature of 90°C in approximately 35 minutes.
- Heating via dry heat or moisturized air heating, which prevents food from drying out.
- Capable of holding GN 2/1 and GN 1/1 containers or plates on grids (grids included).
- Ergonomic handles to facilitate handling.
- Complies with main international certification bodies and is CE marked.

Construction

- Equipped with spiral cable.
- Constructed in double-walled 304 AISI stainless steel with insulated panels.
- Thick, all-round perimetral bumpers on sides, doors and handles to improve shock absorption.
- Two fixed and two swivelling castors with brakes, all 125 mm in diameter.

Optional Accessories


- Pair of 2/1GN aisi 304 stainless steel grids PNC 922175 ☐




Electrolux

Service Trolleys
Heated Banquet Trolley - 20x2/1 GN

Front

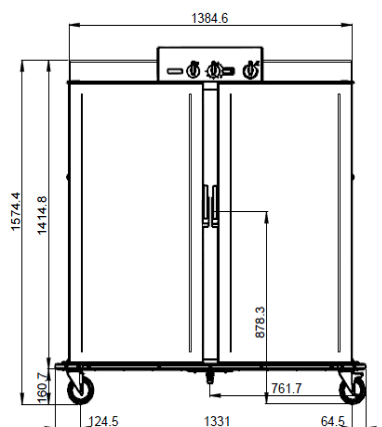


Side

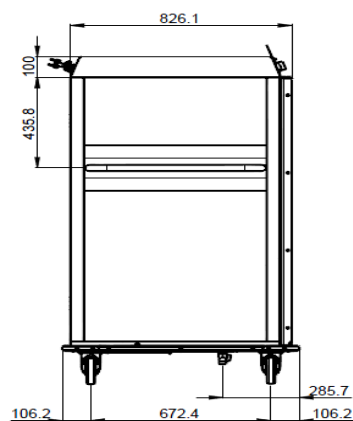

EI = Electrical inlet (power)

Top

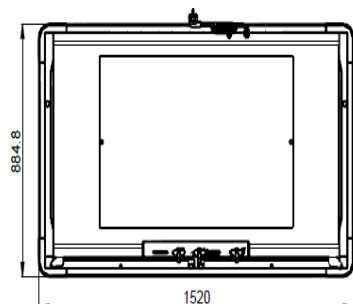

Electric

Supply voltage:

351157 (BT2021H)

220-230 V/1N ph/50/60 Hz

Total Watts:

3.2 kW

Key Information:

| | |
|------------------------------|---------|
| GN 2/1 containers - 100 | 20 |
| GN 1/1 containers - 100 | 40 |
| Load capacity | 340 kg |
| External dimensions, Width: | 1520 mm |
| External dimensions, Height: | 1570 mm |
| External dimensions, Depth: | 885 mm |