


specifications

SC430N

Bottom Mount, 1 Glass Door, Upright Fridge

Project: _____

Item No: _____

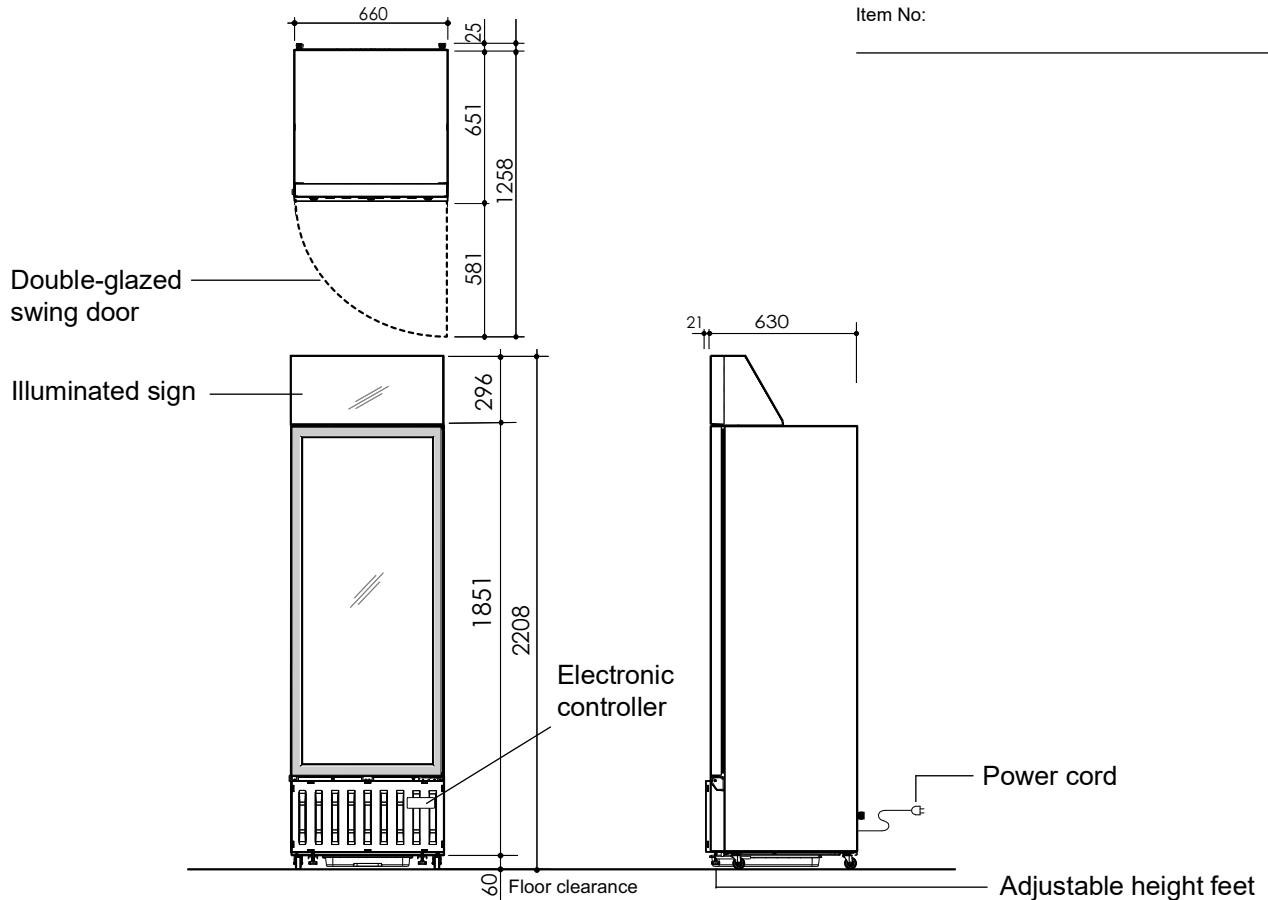

| CABINET | |
|---------------------------------|---|
| Doors | 1 × self-closing, double-glazed, argon-filled, toughened safety glass swing doors (hinged right hand) |
| Internal door opening | 1 × door opening: 1505 mm high × 655 mm wide |
| Shelves | 5 × adjustable height, full width wire shelves: 560 mm wide × 410 mm deep |
| Sign | Illuminated sign |
| Material | Powder-coated galvanised steel exterior, plastic interior |
| PERFORMANCE | |
| Max. ambient temperature | 35°C |
| Temperature range | 0°C to 5°C |
| Noise measurement | 65 dB(A) |
| GEMS rating class | M1 |
| GEMS energy consumption | 2.74 kWh/24 h |
| GEMS annual running cost | \$300 p.a. (@ \$0.30/kWh) |
| ELECTRICAL | |
| Electrical safety climate class | 5 |
| Interior lighting | 1 × 7W switched LED strip lighting |
| Sign lighting | 1 × 11W switched LED strip lighting |
| Power cord | Supplied with 10 amp plug and 1.7 m lead |
| Power supply | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw | 2.3 amps |
| REFRIGERATION | |
| Controller | Electronic controller with digital temperature display |
| Refrigeration system | Bottom-mounted split refrigeration system |
| Refrigerant | R290 / 45g (natural refrigerant) |
| Nominal capacity | 320 watts |
| Heat rejection (avg./peak) | 115 watts/140 watts |
| Drainage | No plumbing required |

| DIMENSIONS | | |
|--------------|----------------------|----------|
| | External | Internal |
| Height | 2208 mm* | 1430 mm |
| Width | 660 mm | 570 mm |
| Depth | 630 mm | 525 mm |
| Floor area | 0.429 m ² | |
| Weight | 112 kg | |
| Gross volume | 420 litres | |

*Height 2208 mm includes castors.

| Dimensional tolerances | | |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5 mm | |
| More than 1 metre | -5 mm to +10 mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | +15 mm |

| Ventilation requirements | |
|--------------------------|--------------|
| Top | Not required |
| Sides | Not required |
| Back | 100 mm |
| Bottom | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

PSS0685 Rev. 1.2 Jan. 2023

SKOPE INDUSTRIES LIMITED

Australia Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com

