

SkyLine PremiumS Natural Gas Combi Oven 6GN1/1, Green Version

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



229760 (ECOG61T3G0)

SkyLine PremiumS Combi Boiler Oven with touch screen control, 6x1/1GN, gas, 3 cooking modes (automatic, recipe program, manual), automatic cleaning, Green Version with 3-glass door

229790 (ECOG61T3G6)

SkyLine PremiumS combi boiler oven with touch screen control, 6x1/1GN, gas, 3 cooking modes (automatic, recipe program, manual), automatic cleaning, Green Version with 3-glass door

Short Form Specification

Item No.

Combi oven with high resolution full touch screen interface, multilanguage

- Built-in steam generator with real humidity control based upon Lambda Sensor
- OptiFlow air distribution system to achieve maximum performance with 7 fan speed levels
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid
- Cooking modes: Automatic (9 food families with 100+ different pre-installed variants); Programs (a maximum of 1000 recipes can be stored and organized in 16 different categories); Manual (steam, combi and convection cycles); Specialistic Cycles (regeneration, Low Temperature Cooking, proving, EcoDelta, Sous-Vide, Static-Combi, Pasteurization of pasta, dehydration, Food Safe Control and Advanced Food Safe Control)
- Special functions: MultiTimer cooking, Plan-n-Save to cut running costs, Make-it-Mine to customize interface, SkyHub to customize homepage, agenda MyPlanner, SkyDuo connection to SkyLine ChillerS, automatic backup mode to avoid downtime
- USB port to download HACCP data, programs and settings. Connectivity ready
- 6-point multi sensor core temperature probe
- Triple-glass door with double LED lights line
- Stainless steel construction throughout
- Supplied with n.1 tray rack 1/1GN, 67mm pitch

Main Features

- High resolution full touch screen interface (translated in more than 30 languages) - color-blind friendly panel.
- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C - 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C - 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C - 99 °C): ideal for sous-vide, re-thermalization and delicate cooking.
Steam cycle (100 °C): seafood and vegetables.
High temperature steam (25 °C - 130 °C).
- Automatic mode including 9 food families (meat, poultry, fish, vegetables, pasta/rice, eggs, savory and sweet bakery, bread, dessert) with 100+ different pre-installed variants. Through Automatic Sensing Phase the oven optimizes the cooking process according to size, quantity and type of food loaded to achieve the selected cooking result. Real time overview of the cooking parameters. Possibility to personalize and save up to 70 variants per family.
- Cycles+:
 - Regeneration (ideal for banqueting on plate or rethermalizing on tray),
 - Low Temperature Cooking (to minimize weight loss and maximize food quality) Patented US7750272B2 and related family,
 - Proving cycle,
 - EcoDelta cooking, cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber,
 - Sous-vide cooking,
 - Static Combi (to reproduce traditional cooking from static oven),
 - Pasteurization of pasta,
 - Dehydration cycles (ideal for drying fruits, vegetables, meats, seafood),
 - Food Safe Control (to automatically monitor safety of cooking process in compliance with HACCP hygienic standards) Patented US6818865B2 and related family,
 - Advanced Food Safe Control (to drive the cooking with pasteurization factor).
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- OptiFlow air distribution system to achieve

APPROVAL:

maximum performance in cooking evenness and temperature control thanks to a special design of the cooking chamber combined with high precision variable speed fan and venting valve.

- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Pictures upload for full customization of cooking cycles.
- Automatic fast cool down and pre-heat function.
- Reduced power function for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- 3 different chemical options available: solid (phosphate-free), liquid (requires optional accessory), enzymatic.
- Plan-n-Save function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency point of view.
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts for each task.
- With SkyDuo the Oven and the Blast Chiller are connected to each other and communicate in order to guide the user through the cook&chill process optimizing time and efficiency (SkyDuo Kit available as optional accessory).
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Automatic consumption visualization at the end of the cycle.
- Capacity: 6 GN 1/1 trays.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory – contact the Company for more details).

Construction

- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler (Registered Design at EPO).
- Triple thermo-glazed door with 2 hinged inside panels

for easy cleaning and double LED lights line.

- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- Integrated spray gun with automatic retracting system for fast rinsing.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

Optional Accessories

- | | | |
|---|------------|---|
| • Water softener with cartridge and flow meter for 6 & 10 GN 1/1 ovens (low-medium steam usage - less than 2hrs per day full steam) | PNC 920002 | □ |
| • Water softener with cartridge and flow meter (high steam usage) | PNC 920003 | □ |
| • Water softener with salt for ovens with automatic regeneration of resin | PNC 921305 | □ |
| • Resin sanitizer for water softener (921305) | PNC 921306 | □ |
| • Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one) | PNC 922003 | □ |
| • Pair of AISI 304 stainless steel grids, GN 1/1 | PNC 922017 | □ |
| • Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922036 | □ |
| • AISI 304 stainless steel grid, GN 1/1 | PNC 922062 | □ |
| • Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 | PNC 922086 | □ |
| • External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) | PNC 922171 | □ |
| • Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm | PNC 922189 | □ |
| • Baking tray with 4 edges in perforated aluminum, 400x600x20mm | PNC 922190 | □ |
| • Baking tray with 4 edges in aluminum, 400x600x20mm | PNC 922191 | □ |
| • Pair of frying baskets | PNC 922239 | □ |
| • AISI 304 stainless steel bakery/pastry grid 400x600mm | PNC 922264 | □ |
| • Double-step door opening kit | PNC 922265 | □ |
| • Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922266 | □ |
| • USB probe for sous-vide cooking | PNC 922281 | □ |
| • Grease collection tray, GN 1/1, H=100 mm | PNC 922321 | □ |
| • Kit universal skewer rack and 4 long skewers for Lengthwise ovens | PNC 922324 | □ |
| • Universal skewer rack | PNC 922326 | □ |
| • 4 long skewers | PNC 922327 | □ |
| • Volcano Smoker for lengthwise and crosswise oven | PNC 922338 | □ |
| • Water nanofilter for 6 & 10 GN 1/1 ovens | PNC 922342 | □ |
| • External reverse osmosis filter for 6 & 10 GN 1/1 ovens | PNC 922343 | □ |
| • Multipurpose hook | PNC 922348 | □ |
| • 4 flanged feet for 6 & 10 GN, 2", 100-130mm | PNC 922351 | □ |
| • Grid for whole duck (8 per grid - 1,8kg each), GN 1/1 | PNC 922362 | □ |
| • Tray support for 6 & 10 GN 1/1 disassembled | PNC 922382 | □ |
| • Wall mounted detergent tank holder | PNC 922386 | □ |


• SONDA SPILLONE USB	PNC 922390	• Kit to convert from natural gas to LPG	PNC 922670
• Tray rack with wheels, 6 GN 1/1, 65mm pitch	PNC 922600	• Kit to convert from LPG to natural gas	PNC 922671
• Tray rack with wheels, 5 GN 1/1, 80mm pitch	PNC 922606	• Flue condenser for gas oven	PNC 922678
• Bakery/pastry tray rack with wheels 400x600mm for 6 GN 1/1 oven and blast chiller freezer, 80mm pitch (5 runners)	PNC 922607	• Fixed tray rack for 6 GN 1/1 and 400x600mm grids	PNC 922684
• Slide-in rack with handle for 6 & 10 GN 1/1 oven	PNC 922610	• Kit to fix oven to the wall	PNC 922687
• Open base with tray support for 6 & 10 GN 1/1 oven	PNC 922612	• Tray support for 6 & 10 GN 1/1 oven base	PNC 922690
• Cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 922614	• 4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm	PNC 922693
• Hot cupboard base with tray support for 6 & 10 GN 1/1 oven holding GN 1/1 or 400x600mm	PNC 922615	• Wifi board (NIU)	PNC 922695
• External connection kit for liquid detergent and rinse aid	PNC 922618	• ETHERNET BOARD (NIU)	PNC 922696
• Grease collection kit for GN 1/1-2/1 cupboard base (trolley with 2 tanks, open/close device and drain)	PNC 922619	• Detergent tank holder for open base	PNC 922699
• Stacking kit for 6 GN 1/1 oven placed on gas 6 GN 1/1 oven	PNC 922622	• Bakery/pastry runners 400x600mm for 6 & 10 GN 1/1 oven base	PNC 922702
• Stacking kit for 6 GN 1/1 oven placed on gas 10 GN 1/1 oven	PNC 922623	• Wheels for stacked ovens	PNC 922704
• Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller freezer	PNC 922626	• Chimney adaptor needed in case of conversion of 6 GN 1/1 or 6 GN 2/1 ovens from natural gas to LPG	PNC 922706
• Trolley for mobile rack for 2 stacked 6 GN 1/1 ovens on riser	PNC 922628	• Spit for lamb or suckling pig (up to 12kg) for GN 1/1 ovens	PNC 922709
• Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens	PNC 922630	• Mesh grilling grid, GN 1/1	PNC 922713
• Riser on feet for 2 6 GN 1/1 ovens or a 6 GN 1/1 oven on base	PNC 922632	• Probe holder for liquids	PNC 922714
• Riser on wheels for stacked 2x6 GN 1/1 ovens, height 250mm	PNC 922635	• Exhaust hood with fan for 6 & 10 GN 1/1 ovens	PNC 922728
• Stainless steel drain kit for 6 & 10 GN oven, dia=50mm	PNC 922636	• Exhaust hood with fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922732
• Plastic drain kit for 6 & 10 GN oven, dia=50mm	PNC 922637	• Exhaust hood without fan for 6&10 1/1GN ovens	PNC 922733
• Grease collection kit for open base (trolley with 2 tanks, open/close device and drain)	PNC 922639	• Exhaust hood without fan for stacking 6+6 or 6+10 GN 1/1 ovens	PNC 922737
• Wall support for 6 GN 1/1 oven	PNC 922643	• Fixed tray rack, 5 GN 1/1, 85mm pitch	PNC 922740
• Dehydration tray, GN 1/1, H=20mm	PNC 922651	• 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm	PNC 922745
• Flat dehydration tray, GN 1/1	PNC 922652	• Tray for traditional static cooking, H=100mm	PNC 922746
• Open base for 6 & 10 GN 1/1 oven, disassembled - NO accessory can be fitted with the exception of 922382	PNC 922653	• Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747
• Bakery/pastry rack kit for 6 GN 1/1 oven with 5 racks 400x600mm and 80mm pitch	PNC 922655	• Trolley for grease collection kit	PNC 922752
• Stacking kit for gas 6 & 10 GN 1/1 oven placed on 7kg and 15kg crosswise blast chiller freezer	PNC 922657	• Water inlet pressure reducer	PNC 922773
• Heat shield for stacked ovens 6 GN 1/1 on 6 GN 1/1	PNC 922660	• Kit for installation of electric power peak management system for 6 GN and 10 GN ovens	PNC 922774
• Heat shield for stacked ovens 6 GN 1/1 on 10 GN 1/1	PNC 922661	• Extension for condensation tube, 37cm	PNC 922776
• Heat shield for 6 GN 1/1 oven	PNC 922662	• Non-stick universal pan, GN 1/1, H=20mm	PNC 925000
		• Non-stick universal pan, GN 1/1, H=40mm	PNC 925001
		• Non-stick universal pan, GN 1/1, H=60mm	PNC 925002
		• Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003
		• Aluminum grill, GN 1/1	PNC 925004
		• Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005
		• Flat baking tray with 2 edges, GN 1/1	PNC 925006
		• Baking tray for 4 baguettes, GN 1/1	PNC 925007
		• Potato baker for 28 potatoes, GN 1/1	PNC 925008
		• Non-stick universal pan, GN 1/2, H=20mm	PNC 925009
		• Non-stick universal pan, GN 1/2, H=40mm	PNC 925010
		• Non-stick universal pan, GN 1/2, H=60mm	PNC 925011




Electrolux
PROFESSIONAL

SkyLine PremiumS Natural Gas Combi Oven 6GN1/1, Green Version

Front

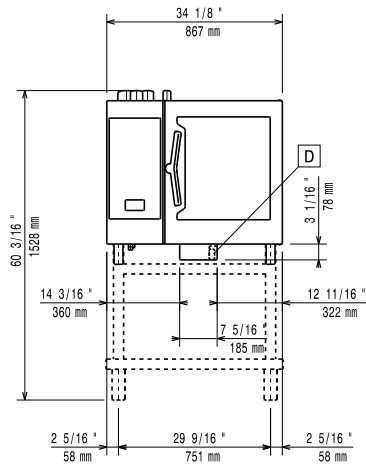


Side

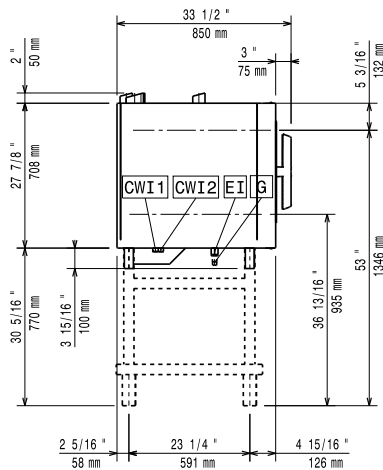

CWI1 = Cold Water inlet 1 (cleaning) EI = Electrical inlet (power)
CWI2 = Cold Water Inlet 2 (steam generator) G = Gas connection
D = Drain
DO = Overflow drain pipe

Top

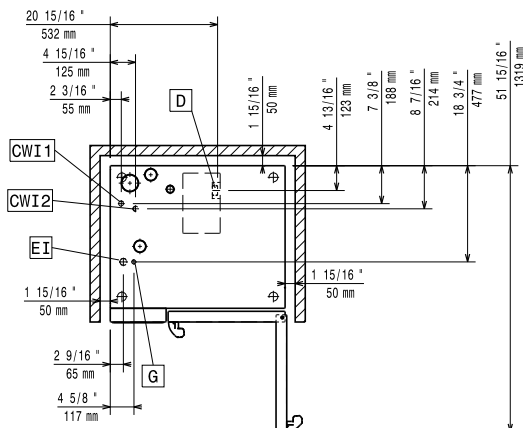

Electric

Supply voltage:

229760 (ECOG61T3G0) 220-240 V/1 ph/50 Hz

229790 (ECOG61T3G6) 220-230 V/1 ph/60 Hz

Electrical power, default: 1.1 kW

Default power corresponds to factory test conditions. When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range.

Electrical power max.: 1.1 kW

Circuit breaker required

Gas

Gas Power: 19 kW

Standard gas delivery: Natural Gas G20

ISO 7/1 gas connection diameter: 1/2" MNPT

LPG:

Total thermal load: 76429 BTU (19 kW)

Water:

Water inlet connections

"CWI1-CWI2": 3/4"

Pressure, bar min/max: 1-4.5 bar

Drain "D": 50mm

Max inlet water supply temperature: 30 °C

Chlorides: <17 ppm

Conductivity:

229760 (ECOG61T3G0) >285 µS/cm

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance: 5 cm rear and right hand sides.

Clearance:

Suggested clearance for service access:

50 cm left hand side.

Capacity:

Trays type: 6 - 1/1 Gastronorm

Max load capacity: 30 kg

Key Information:

Door hinges:

External dimensions, Width: 867 mm

External dimensions, Height: 808 mm

External dimensions, Depth: 775 mm

Weight: 140.5 kg

Net weight: 140.5 kg

Shipping weight: 155.5 kg

Shipping volume: 0.84 m³



SkyLine PremiumS
Natural Gas Combi Oven 6GN1/1, Green Version

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2021.01.11