

specifications

CL400i-2

SKOPE GEN 2: Counterline Chiller
2 Door Integral





CABINET DIMENSIONS


	External	Internal
Height:	725mm*	545mm
Width:	1600mm	1120mm
Depth:	680mm**	565mm
Floor area:	1.09m ²	

* Height excludes castors, legs or optional worktop

** Depth with optional worktop is 700mm

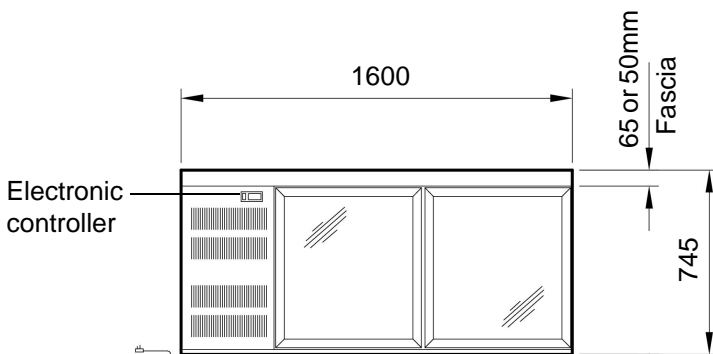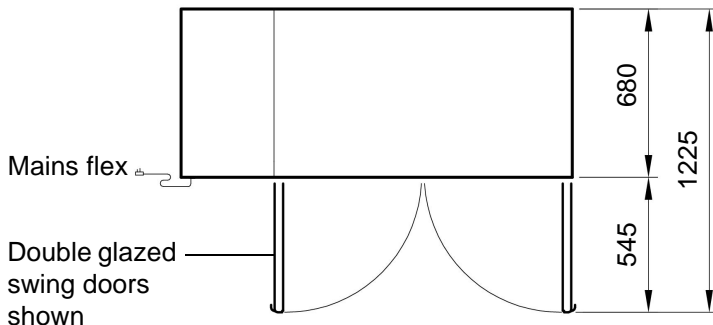

Side mounted integral refrigeration unit

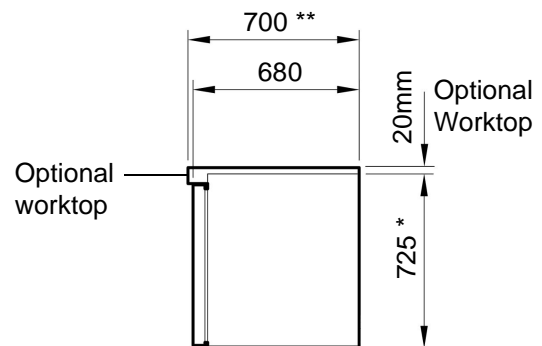

Copyright © 2003 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Electronic controlled, side mounted, integral refrigeration unit
Refrigerant:	R134a / 425 g
Nominal capacity:	581 Watts
Cabinet internal volume:	390 litres
Insulation:	42mm polyurethane foam
Cabinet temperature range:	+1°C to +4°C in 32°C ambient
Drainage:	No plumbing required
Electrical:	230-240 Volts a.c. 50 Hz, single phase supply
Internal lighting:	1 x 21 Watt T5 fluorescent tube (Ø16mm x 850mm)
Internal door opening size:	2 door openings: 544mm high x 520mm wide
Doors - Swing:	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Doors - Sliding:	Self-closing, double glazed, toughened Low-E safety glass with black plastic door extrusion and anodised aluminium outer frame
Worktop (optional):	Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia
Shelves:	Adjustable height, white plastic coated, steel wire shelves - two per door

Certified ISO 9001 by

SKOPE Industries Limited reserve the right to alter specifications without notice.

Rev 1.0 November 2003 edition



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz