
specifications CC700i-2





CABINET DIMENSIONS External

Height: 725mm* 545mm Width: 2820mm 2340mm Depth: 600mm 485mm


Internal

1.70m² Floor area:

900


545


Height excludes castors or legs Double Glazed Swing Doors Shown



Side Mounted Integral Refrigeration Unit

Mains flex

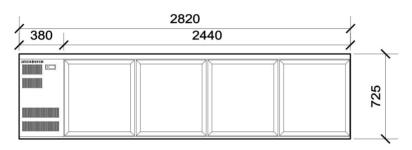



Copyright © 2007 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, integral refrigeration unit

Refrigerant: R134a / 425 g **Nominal capacity:** 737 Watts Cabinet internal volume: 700 litres

Insulation: 50mm polyurethane foam Cabinet temperature range: +1°C to +4°C in 32°C ambient

Drainage: No plumbing required

Electrical: 230-240 Volts a.c. 50 Hz, single phase supply Internal lighting: 2 x 21 Watt T5 fluorescent tube (Ø16mm x 850mm)

Internal door opening size: 4 door openings: 544mm high x 520mm wide

Doors - Swing: Self-closing, double glazed, toughened Low-E safety glass with aluminium

extrusion or insulated solid doors

Doors - Sliding: Self-closing, double glazed, toughened Low-E safety glass with black

plastic door extrusion and anodised aluminium outer frame

Worktop (optional): Optional 20mm high stainless steel worktop with 65mm fascia

Adjustable height, white plastic coated, steel wire shelves - two per door Shelves:

SKOPE Industries Limited reserve the right to alter specifications without notice.

Rev 1.0 May 2007 edition



