



# Electrolux

## Vacuum Packers Table Top Vacuum Packer -20 m<sup>3</sup>/h

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Vacuum Packers  
Table Top Vacuum Packer -20 m<sup>3</sup>/h

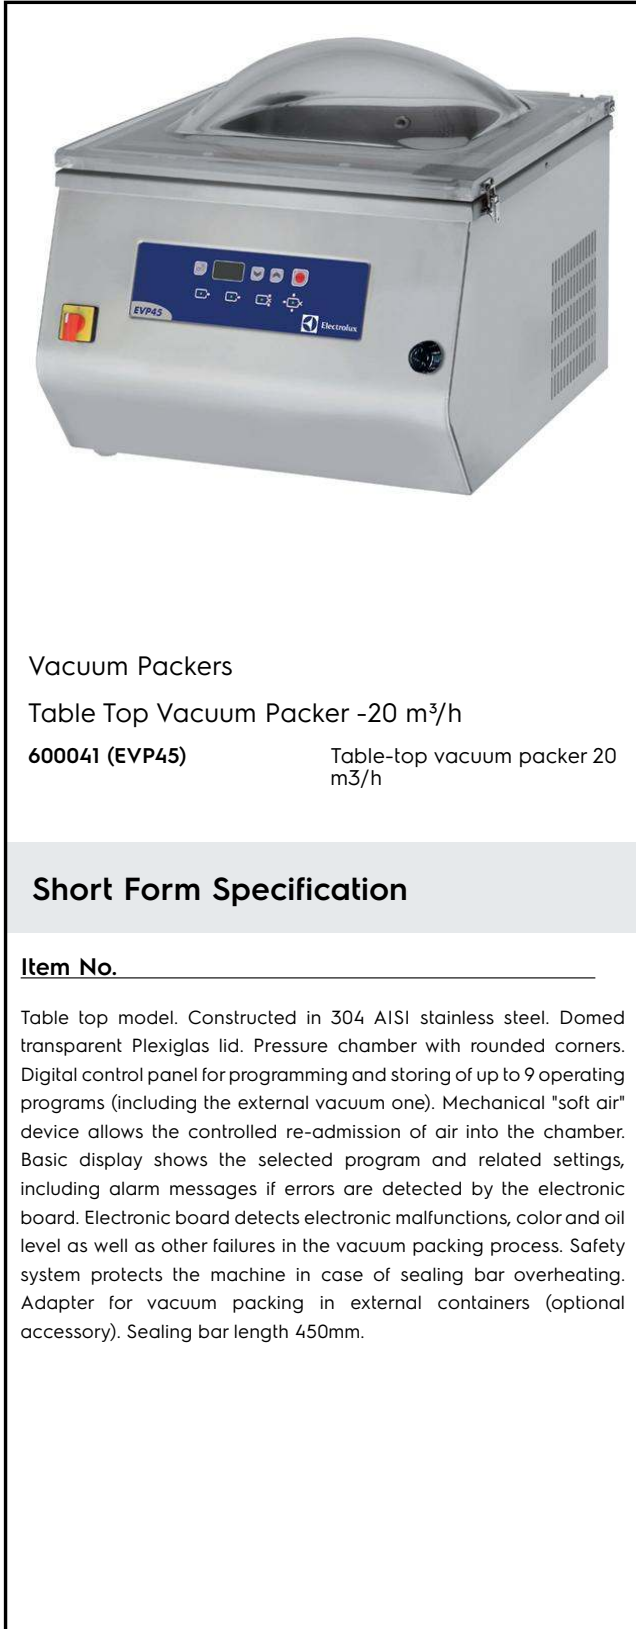

Vacuum Packers

Table Top Vacuum Packer -20 m<sup>3</sup>/h

600041 (EVP45)

Table-top vacuum packer 20 m<sup>3</sup>/h

### Short Form Specification

Item No. \_\_\_\_\_

Table top model. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 9 operating programs (including the external vacuum one). Mechanical "soft air" device allows the controlled re-admission of air into the chamber. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 450mm.

### Main Features

- Digital control panel allows the selection of up to 9 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program: P1 to P8 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing) while P9, "external vacuum" is composed by only 2 selections (vacuum and extravacuum).
- To ensure simplicity of use and maximum reliability electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process.
- Model complies with international hygiene and cleanability standards.
- "Soft air" device allowing to control the re-admission of air into the chamber.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Safety system protects the machine in case of sealing bars overheat.
- Sealing bar 450 mm.
- Digital control panel allows programming and storing of up to 9 operating programs for a better vacuum pressure and heat seal times.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.

### Construction


- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglass lid.
- Pressure chamber with rounded corners.

### Optional Accessories


- Kit adapter for external vacuum PNC packing. Only for 6, 8, 10 and 20 m<sup>3</sup>/h vacuum packers 650008
- Inclined filling table to vacuum pack liquids for 20 m<sup>3</sup>/h vacuum packers 650010

APPROVAL: \_\_\_\_\_

Front

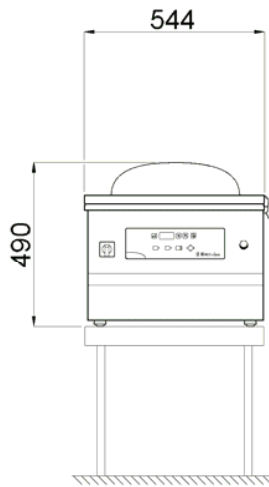

Side

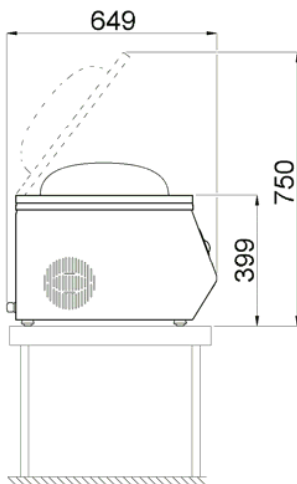

EI = Electrical connection

### Electric

Supply voltage:	
600041 (EVP45)	220 V/1N ph/50/60 Hz
Total Watts:	1.1 kW

### Key Information:

Pump:	20 m <sup>3</sup> /h
External dimensions, Height:	500 mm
External dimensions, Width:	550 mm
External dimensions, Depth:	645 mm
Chamber width:	456 mm
Chamber depth:	466 mm
Chamber height:	218 mm
Sealing bar length:	450 mm
Net weight (kg):	80