PNC 206136



Electrolux

Modular Cooking Range Line 700XP 22 It. Electric Multifunctional Cooker with compound bottom

ITEM #	
MODEL #	
NAME #	
SIS#	
AIA #	



Modular Cooking Range Line

700XP 22 It. Electric Multifunctional Cooker with compound bottom

371110 (E7MFEHDI00)

700XP ELECTRIC MULTIFUNCTIONAL COOKER 22 LT - WITH COMPOUND BOTTOM - 400

Short Form Specification

Item No.

Heating via incoloy armoured heating elements. To be installed on 50 mm high feet for cleaning ease. Well to have rounded corners and cooking surface in compound steel (a 3mm layer of 316 AISI stainless steel on top of a 12mm layer of mild steel). Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Multi purpose cooking appliance that can be used to shallow fry, cook liquids or even as a bain marie. Unit can be used for sautéing, poaching, steaming, simmering, stewing, braising, boiling and preparing white sauces.
- Well cooking surface made in compound steel (a 3mm layer of 316 AISI stainless steel on top of a 12mm layer of mild steel) for optimum grilling results.
- The stainless steel well to have rounded corners to facilitate cleaning.
- Bottom temperature control is precisely set by a thermostat on the control panel.
- Temperature can be set from 100 °C to 250 °C.
- Uniform temperature distribution over the whole base.
- Short heat-up time of the empty pan.
- Unit to be heated via incoloy armoured heating
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt

Included Accessories

 1 of Scraper for smooth plate fry tops PNC 164255 1 of Blades with rounded sides for PNC 921694 scraper for multifunctional cookers


Optional Accessories

- Flanged feet kit Kit 4 feet for concrete installation (not PNC 206210 for 900 line free standing grill) 2 supports with side runners for 4 GN PNC 206244 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)
- PNC 206249 Pair of side kicking strips
- Pair of side kicking strips for concrete PNC 206265 installation

APPROVAL:



Modular Cooking Range Line 700XP 22 It. Electric Multifunctional Cooker with compound bottom

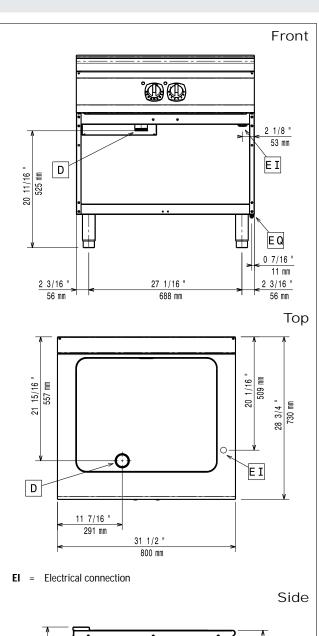

Electric

Supply voltage:

371110(E7MFEHDI00) 400 V/3N ph/50/60 Hz

Total Watts: 10 kW

Key Information:

100 °C **Working Temperature MIN:** Working Temperature MAX: 250 °C Net weight: 75 kg Shipping weight: 90 kg Shipping height: 1140 mm Shipping width: 900 mm Shipping depth: 820 mm 0.84 m³ Shipping volume:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

