



# Electrolux

## Tuttopizza Showcase 2 Doors, 12 Drawers Refrigerated Counter with Show Case

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

2 Doors, 12 Drawers Refrigerated Counter with Show Case  
Tuttopizza Showcase

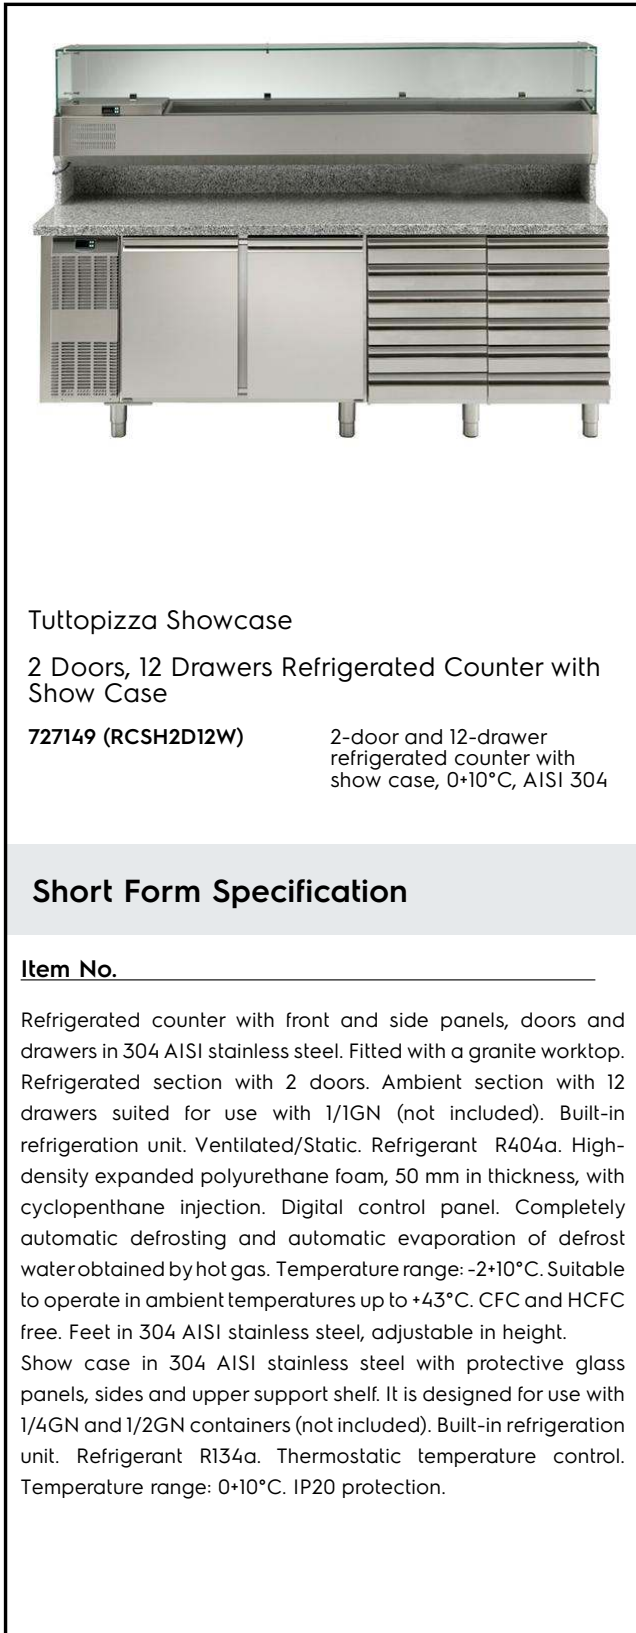

### Tuttopizza Showcase

2 Doors, 12 Drawers Refrigerated Counter with Show Case

727149 (RCSH2D12W)

2-door and 12-drawer refrigerated counter with show case, 0+10°C, AISI 304

### Short Form Specification

**Item No.** \_\_\_\_\_

Refrigerated counter with front and side panels, doors and drawers in 304 AISI stainless steel. Fitted with a granite worktop. Refrigerated section with 2 doors. Ambient section with 12 drawers suited for use with 1/1GN (not included). Built-in refrigeration unit. Ventilated/Static. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Temperature range: -2+10°C. Suitable to operate in ambient temperatures up to +43°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height. Show case in 304 AISI stainless steel with protective glass panels, sides and upper support shelf. It is designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R134a. Thermostatic temperature control. Temperature range: 0+10°C. IP20 protection.

### Main Features

- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 1/2 or 1/3 drawers kits can be fitted on site as an alternative to the doors.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Refrigerated compartments can accommodate GN 1/1 grids or trays in 6 positions.
- Granite worktop for easy and fast dough spreading. 165mm high upstand to prevent foodstuff from accidentally falling from the sides and back during the preparation phase.
- Showcase and counter equipped with temperature setting, probe monitoring, HACCP alarms, service alarms and parameters customization as standard; remote HACCP monitoring available through an accessory kit.
- Neutral set of drawers on the right side allows dough storage both in GN 1/1 or 60x40cm trays.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on 150 mm adjustable feet.
- HCFC, CFC and HFC free insulation (Cyclopentane), HCFC and CFC free refrigerant gas (R404a).
- Showcase with HCFC and CFC free refrigerant gas (R134a) and insulation.
- Showcase constructed in A304 stainless steel with rounded corners and tempered glass sides, backpanel and upper shelf.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.
- Showcase and counter with IPX5 digital control and temperature display with integrated on/off button to grant reliability in every kitchen environment.
- Showcase with built-in, independent cooling unit with hidden evaporator designed to keep the food on covered trays between 0 °C and +10 °C at 43° C ambient temperature.
- Rounded internal corners. Drain and magnetic gaskets are removable without the use of tools and the condenser filter can be accessed quickly for ease of cleaning.
- Counter to feature built-in cooling unit with ventilated cavity and hidden evaporator foamed in the backside designed to work at +10°C even at 43°C ambient temperature.
- Counter constructed in A304 stainless steel with aluminum internal backpanel for low energy consumption, fast temperature recovery and optimal temperature uniformity.


### Included Accessories

- 2 of Stainless steel internal structure PNC 880140 to support 6 grids (right and left)
- 2 of 1/1GN grey rilsan grid PNC 881435

APPROVAL: \_\_\_\_\_

**Optional Accessories**

- 1/1GN plastic container h=100mm PNC 811451
- Reversibility door kit PNC 880046
- 3x $\frac{1}{3}$  drawer kit for refrigerated  
counters PNC 880115
- 2x $\frac{1}{2}$  drawer kit for refrigerated  
counters PNC 880118
- 1/3+2/3-bottle drawer kit for  
refrigerated counters PNC 880126
- Kit 2 stainless steel grids GN1/1 for  
refrigerated counters PNC 880139
- Kit integrated HACCP for digital  
refrigerators (IR33) PNC 880252
- 1/1GN plastic container h=65mm PNC 881038
- 1/1GN plastic container h=150mm PNC 881040
- 1/1GN grey rilsan grid PNC 881435
- Printer for HACCP basic version  
(digital control) PNC 881457
- GN containers for refrigerated 2180  
mm show case - n. 5x $\frac{1}{4}$  + n. 3x $\frac{1}{2}$  h.  
150 mm PNC 921852
- Polythene food container 400x600  
mm PNC 921854
- GN containers for refrigerated 2180  
mm show case - n. 7x $\frac{1}{4}$  + n. 2x $\frac{1}{2}$  h.  
150 mm PNC 921855

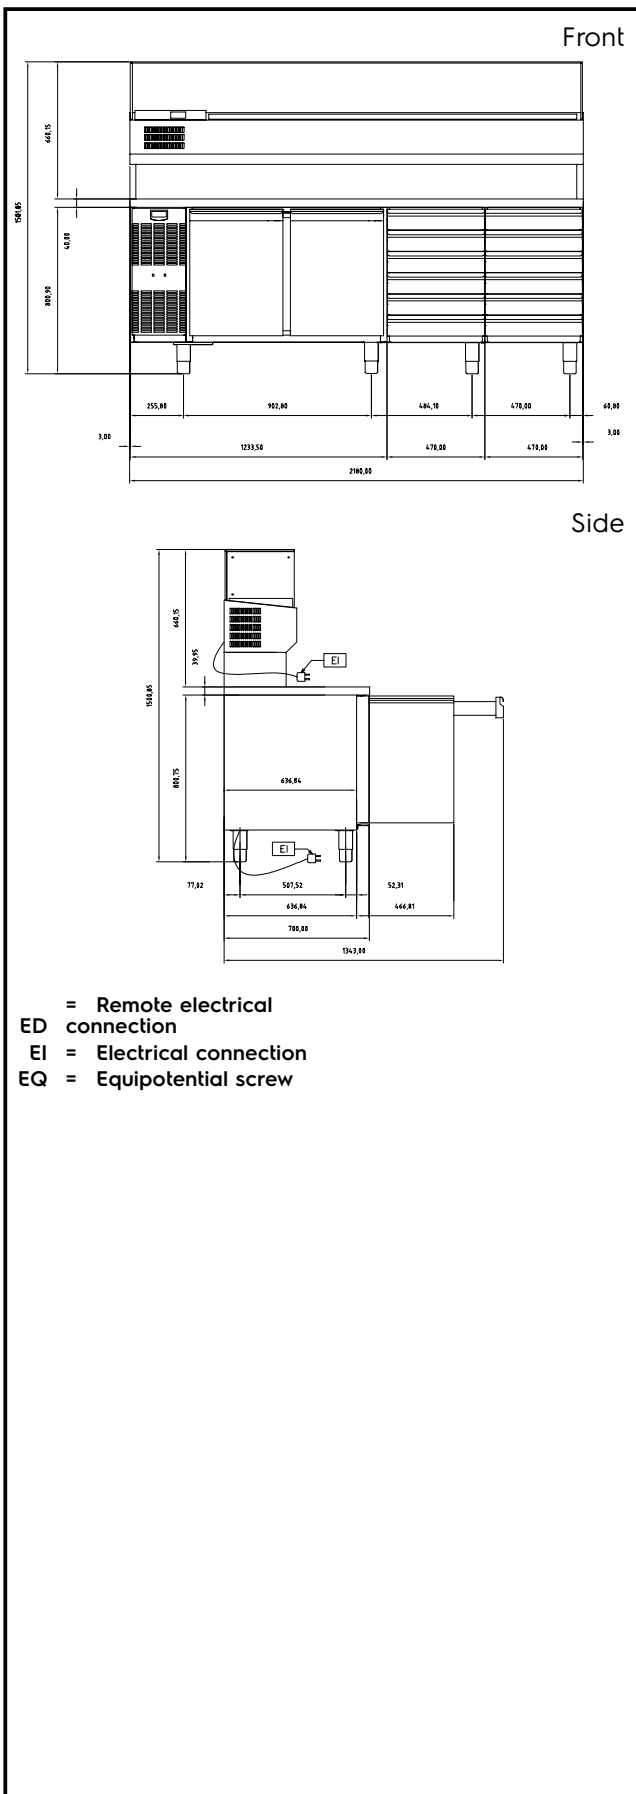

### Electric

Supply voltage:	727149 (RCSH2D12W)	230 V/1 ph/50 Hz
Electrical power:		0.267 kW

### Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Height:	1501 mm
External dimensions, Width:	2180 mm
External dimensions, Depth:	700 mm
External dimensions, Depth with Doors Open:	1110 mm
Number and type of doors:	2
Gross capacity:	560 lt
Net weight:	330 kg
Noise level:	55 dBA
Number and type of grids (included):	2 - GN 1/1
Worktop type:	Marble
N° of drawers:	12

### Refrigeration Data

Control type:	Digital
Refrigerant type:	R404a
Refrigeration power:	448 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	190 g
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated/Static
N° defrost in 24 hrs:	every 6 hrs
<b>Built-in Compressor and Refrigeration Unit</b>	