



# Electrolux

## Tuttopizza Showcase 3 Door Refrigerant Counter with Show Case

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Tuttopizza Showcase  
3 Door Refrigerant Counter with Show Case



Tuttopizza Showcase  
3 Door Refrigerant Counter with Show Case

727150 (RCSH3D)

3-door refrigerated counter with show case, 0+10°C, AISI 304

### Short Form Specification

**Item No.** \_\_\_\_\_

Refrigerated counter with front and side panels, doors and drawers in 304 AISI stainless steel. Fitted with a granite worktop. Refrigerated section with 3 doors. Built-in refrigeration unit. Ventilated/Static. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Temperature range: -2+10°C. Suitable to operate in ambient temperatures up to +43°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height.

Show case in 304 AISI stainless steel with protective glass panels, sides and upper support shelf. It is designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R134a. Thermostatic temperature control. Temperature range: 0+10°C. IP20 protection.

### Main Features

- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 1/2 or 1/3 drawers kits can be fitted on site as an alternative to the doors.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Refrigerated compartments can accommodate GN 1/1 grids or trays in 6 positions.
- Granite worktop for easy and fast dough spreading. 165mm high upstand to prevent foodstuff from accidentally falling from the sides and back during the preparation phase.
- Showcase and counter equipped with temperature setting, probe monitoring, HACCP alarms, service alarms and parameters customization as standard; remote HACCP monitoring available through an accessory kit.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on 150 mm adjustable feet.
- HCFC, CFC and HFC free insulation (Cyclopentane), HCFC and CFC free refrigerant gas (R404a).
- Showcase with HCFC and CFC free refrigerant gas (R134a) and insulation.
- Showcase constructed in A304 stainless steel with rounded corners and tempered glass sides, backpanel and upper shelf.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.
- Showcase and counter with IPX5 digital control and temperature display with integrated on/off button to grant reliability in every kitchen environment.
- Showcase with built-in, independent cooling unit with hidden evaporator designed to keep the food on covered trays between 0 °C and +10 °C at 43° C ambient temperature.
- Rounded internal corners. Drain and magnetic gaskets are removable without the use of tools and the condenser filter can be accessed quickly for ease of cleaning.
- Counter to feature built-in cooling unit with ventilated cavity and hidden evaporator foamed in the backside designed to work at +10°C even at 43°C ambient temperature.
- Counter constructed in A304 stainless steel with aluminum internal backpanel for low energy consumption, fast temperature recovery and optimal temperature uniformity.

### Included Accessories

- 3 of Stainless steel internal structure PNC 880140 to support 6 grids (right and left)
- 3 of 1/1GN grey rilsan grid PNC 881435

### Optional Accessories

- 1/1GN plastic container h=100mm PNC 811451

APPROVAL: \_\_\_\_\_


- Reversibility door kit PNC 880046
- 3x½ drawer kit for refrigerated counters PNC 880115
- 2x½ drawer kit for refrigerated counters PNC 880118
- 1/3+2/3-bottle drawer kit for refrigerated counters PNC 880126
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1GN plastic container h=65mm PNC 881038
- 1/1GN plastic container h=150mm PNC 881040
- 1/1GN grey rilsan grid PNC 881435
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457
- GN containers for refrigerated 1780 mm show case - n. 4x1/4 + n. 2x1/2 h. 150 mm

**Included Accessories**

- 3 of Stainless steel internal structure to support 6 grids (right and left) PNC 880140
- 3 of 1/1GN grey rilsan grid PNC 881435

**Optional Accessories**

- 1/1GN plastic container h=100mm PNC 811451
- Reversibility door kit PNC 880046
- 3x $\frac{1}{3}$  drawer kit for refrigerated counters PNC 880115
- 2x $\frac{1}{2}$  drawer kit for refrigerated counters PNC 880118
- 1/3+2/3-bottle drawer kit for refrigerated counters PNC 880126
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1GN plastic container h=65mm PNC 881038
- 1/1GN plastic container h=150mm PNC 881040
- 1/1GN grey rilsan grid PNC 881435
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457
- GN containers for refrigerated 1780 mm show case - n. 4x $\frac{1}{4}$  + n. 2x $\frac{1}{2}$  h. 150 mm PNC 921850

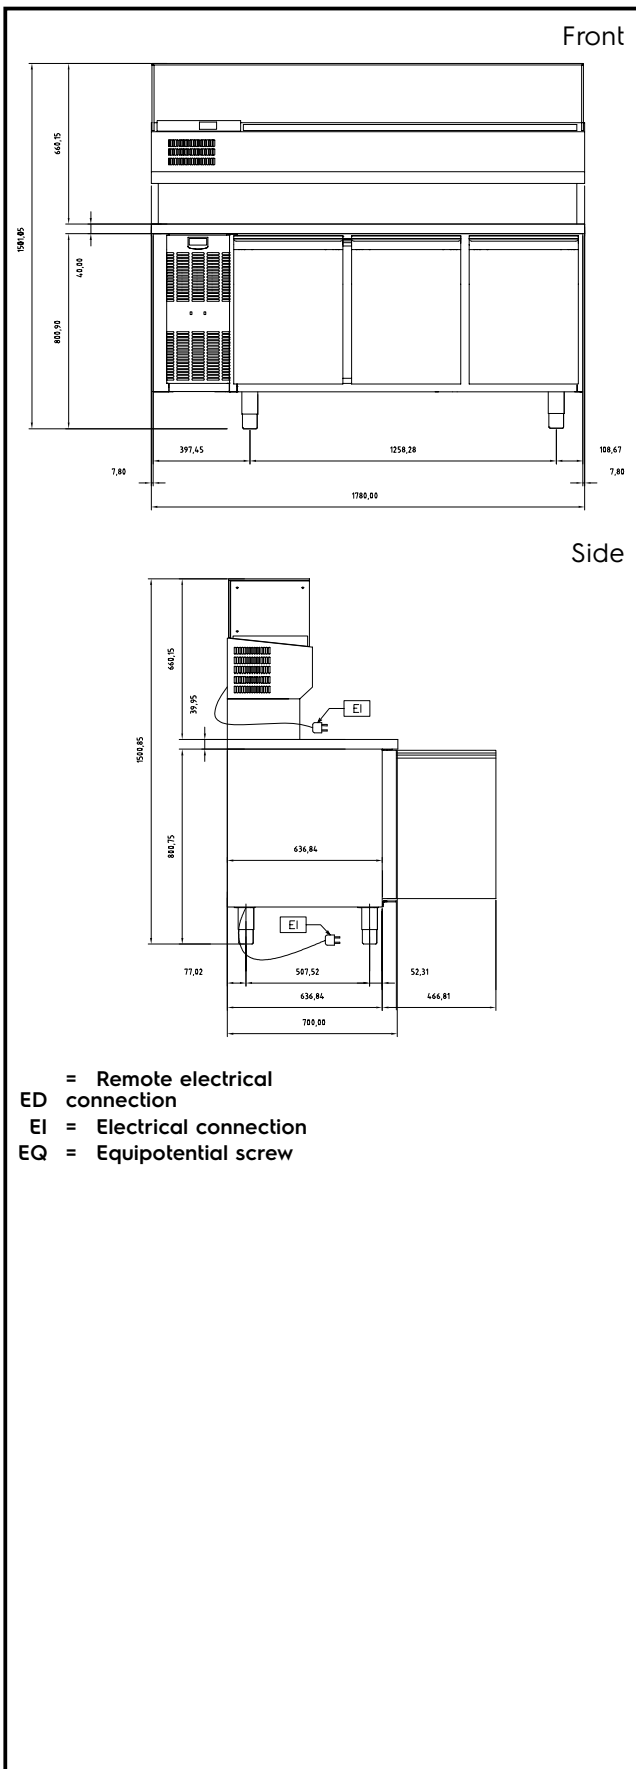

### Electric

**Supply voltage:**  
 727150 (RCSH3D) 230 V/1 ph/50 Hz  
**Electrical power:** 0.293 kW

### Key Information:

**Door hinges:** 1 Left+2 Right  
**External dimensions, Height:** 1501 mm  
**External dimensions, Width:** 1780 mm  
**External dimensions, Depth:** 700 mm  
**External dimensions, Depth with Doors Open:** 1110 mm  
**Number and type of doors:** 3  
**Gross capacity:** 420 lt  
**Net weight:** 290 kg  
**Noise level:** 55 dBA  
**Number and type of grids (included):** 3 - GN 1/1  
**Worktop type:** Marble  
**Built-in Compressor and Refrigeration Unit**

### Refrigeration Data

**Control type:** Digital  
**Refrigerant type:** R404a  
**Refrigeration power:** 448 W  
**Refrigeration power at evaporation temperature:** -10 °C  
**Refrigerant weight:** 210 g  
**Operating temperature min.:** 0 °C  
**Operating temperature max.:** 10 °C  
**Operating mode:** Ventilated/Static  
**N° defrost in 24 hrs:** every 6 hrs