

STGRF15

TOWER COUNTER SERIES CHILLED

COSSIGA

STGRF15-SD




PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front or sliding front doors
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base

Maximum shelf load weight 15kg spread evenly

STGRF15

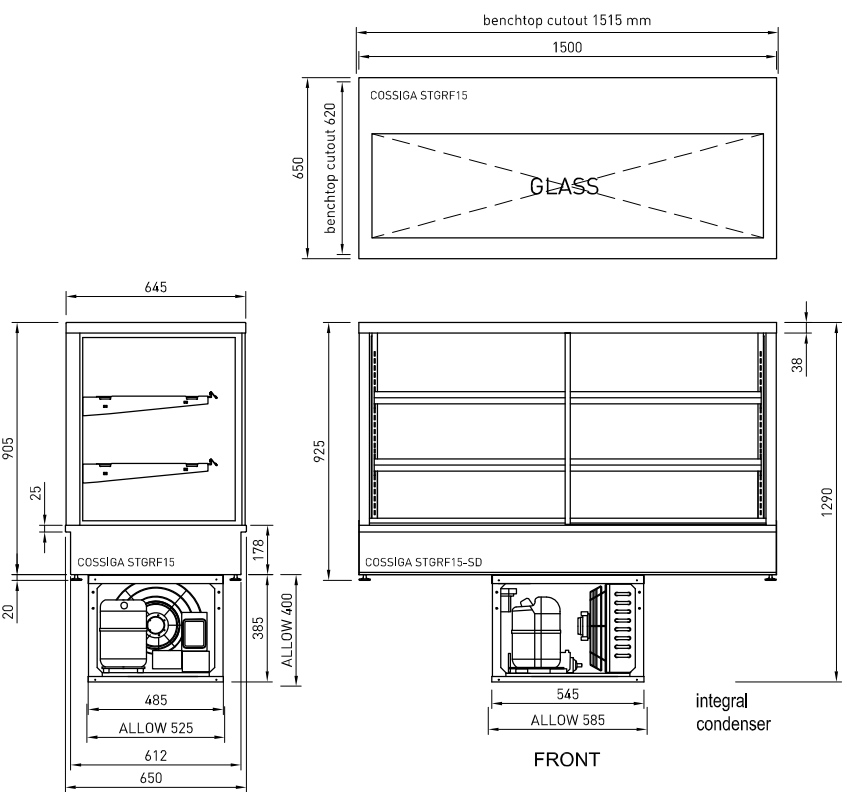

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL                 | CABINET     |            |             | SHELVING  | SHELVING | OPERATING TEMP | SHELF      | BASE TRAY  | TOTAL FOOD  | DISPLAY M <sup>2</sup> | INTERNAL VOLUME M <sup>3</sup> | FREQUENCY | REFRIGERANT | POWER   |     | CONNECTION ELECTRICAL POWER CORD 2200MM |            | VOLTAGE  | PACKED FOR SHIPPING |            |             |        |
|-----------------------|-------------|------------|-------------|-----------|----------|----------------|------------|------------|-------------|------------------------|--------------------------------|-----------|-------------|---------|-----|-----------------------------------------|------------|----------|---------------------|------------|-------------|--------|
|                       | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT KG |          | DEG C          | W X D      | W X D      | 100MM UNITS |                        |                                |           |             | KW 230V | AMP | NZ/AUS 10 AMP                           | UK 13 AMP  |          | LENGTH [MM]         | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| STGRF15<br>STGRF15-SD | 1500        | 650        | 925         | 243       | 2 + BASE | 3-5            | 1390 X 445 | 1440 x 415 | 285         | 1.67                   | 0.75                           | 50/60 HZ  | R290        | 1.24    | 5.4 | 3 PIN PLUG                              | 3 PIN PLUG | 220-240V | 1600                | 730        | 1450        | 300    |