



Electrolux

Digital Undercounter 3 Door Refrigerated Counter with Splashback, -2+10°C, Stainless Steel

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

3 Door Refrigerated Counter with Splashback, -2+10°C, Stainless Steel
Digital Undercounter



790013 (HB3PUA)

3-door refrigerated table with splashback, -2+10°C, stainless steel - 220-230V/1N/50Hz - ASIA

790075 (HB3PUA6)

3-door refrigerated table with splashback, -2+10°C, stainless steel - 220V/1N/60Hz - ASIA

Short Form Specification

Item No. _____

The Electrolux range of refrigerated tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit, in various door or drawer configurations. The model detailed in this sheet has three compartments, three full doors, is equipped with splashback and operates over the temperature range of -2 °C to 10 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Easy to clean reversible door with rounded internal corners.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

Construction

- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Built-in compressor to suit operating conditions.
- Mounted on 150 mm adjustable feet.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- Self closing and reversible left/right doors.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection for long-term insulation and energy saving.
- CFC, HCFC, HFC-free insulation.
- Removable magnetic gasket door with hygienic design.

Included Accessories

- 3 of 1x1/1GN PVC grid for counters PNC 880299

Optional Accessories

APPROVAL: _____



Electrolux


**Digital Undercounter
3 Door Refrigerated Counter with
Splashback, -2+10°C, Stainless Steel**

- Lock kit for counters PNC 880227
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1x1/1GN PVC grid for counters PNC 880299
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Kit of 2x½ drawers for counters PNC 880305
- Kit of 3x½ drawers for counters PNC 880309

**Digital Undercounter
3 Door Refrigerated Counter with Splashback, -2+10°C, Stainless Steel**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2018.05.18

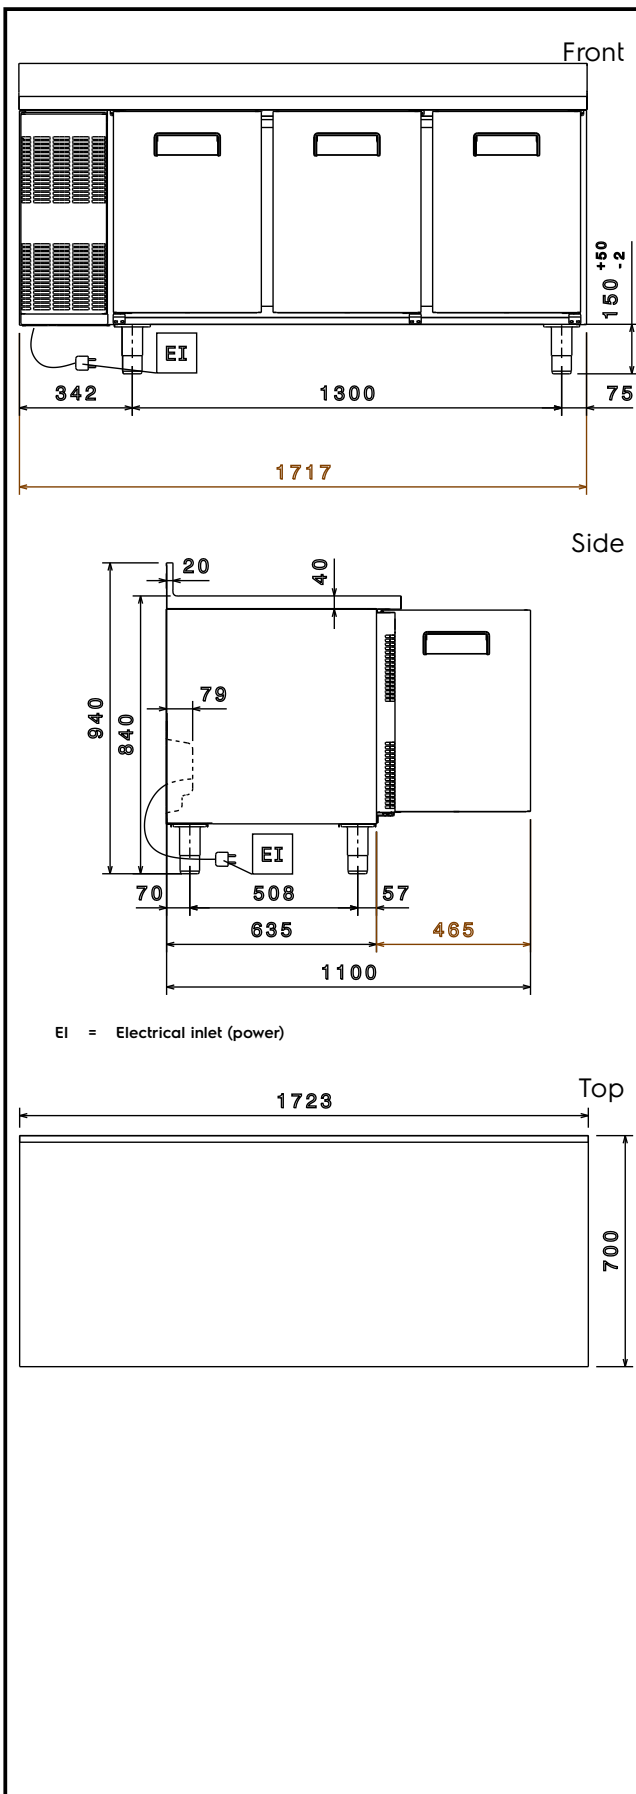

Electric

Supply voltage:

790013 (HB3PUA) 220-230 V/1N ph/50 Hz

790075 (HB3PUA6) 220 V/1N ph/60 Hz

Electrical power max.: 0.35 kW

Key Information:

Gross capacity: 420 lt

Door hinges: 1 Left+2 Right

External dimensions, Width: 1721 mm

External dimensions, Height: 940 mm

External dimensions, Depth: 700 mm

External dimensions, Depth
with Doors Open:

790013 (HB3PUA) 1100 mm

790075 (HB3PUA6) 1098 mm

Depth with doors open:

790013 (HB3PUA) 1100 mm

790075 (HB3PUA6) 1098 mm

Refrigeration Data

Compressor power: 1/3 hp

Refrigerant type: R404a

Refrigeration power:

790013 (HB3PUA) 877 W

790075 (HB3PUA6) 1139 W

Refrigerant weight:

790013 (HB3PUA) 290 g

790075 (HB3PUA6) 240 g

Operating temperature min.: -2 °C

Operating temperature max.: 10 °C