
specifications



RF8.PPZ.3.SD

ReFlex Series, 3 Door (Solid), Medium Pizza Preparation Fridge

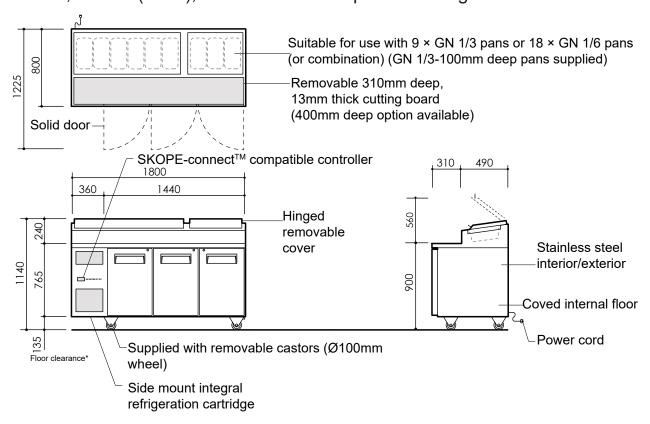

CABINET

Doors 3 × self-closing, lockable, solid swing door with stay-open position at over

90°, hinged LH, LH, RH.

3 × door openings: 590mm high × 370mm wide Internal door opening

6 × adjustable height shelves: Middle shelves: 475mm wide × 610mm Shelves

deep. Outside shelves: 415mm wide × 610mm deep. Each shelf is held in place with four shelf clips, and additional shelf clips available on request.

Worktop Removable, food grade, 13mm plastic cutting board

304 AISI stainless steel interior and exterior Material

PERFORMANCE

Max. ambient temp.

Temperature range 1°C to 5°C (adjustable with SKOPE-connect 0°C to 15°C)

Total energy consumption 5.45 kWh/24h (@ 30°C/55%RH)

Annual running cost \$597 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5 (40°C/40% RH)

2 × 400mm, 4W LED light (door activated) Interior lighting Power cord Supplied with 2.7m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.5 Amps (includes unit 2.2 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect compatible)

Connectivity interface Bluetooth® wireless technology

Side mounted, integral, removable refrigeration cartridge (part number Refrigeration system

ULQCNI-0030)

Refrigerant R290/90g (natural refrigerant)

Nominal capacity 900 Watts

Heat rejection (Avg/peak) 230 Watts/290 Watts No plumbing required Drainage

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020

SKOPE INDUSTRIES LIMITEDAustralian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS		
	External	Internal
Height	1140mm	605mm
Width	1800mm	1350mm
Depth	800mm	640mm
Floor area	1.44m²	
Weight	212kg	
Gross volume	523L	

Height variation	
Supplied castors	1140mm
Supplied height adjustable legs	n.a.
No castors	1005mm

Dimensional tolerances					
Before installing this cabinet allow the following dimensional tolerances:					
Linear dimensions	ar dimensions Cabinet overall dimensions				
Less than 1 metre	±5mm				
More than 1 metre	-5mm to +10mm				
	Length of multiple cabinets				
	At each joint	At each end			
Less than 1 metre	±5mm	+15mm			
More than 1 metre	-5mm to +10mm	+15mm			

Ventilation requirements	
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0668 Rev. 1.2 Nov. 2020



