


# specifications

## RF7.UPF.2.SD

### ReFlex Series, 2 Solid Door Upright Freezer (R290)

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

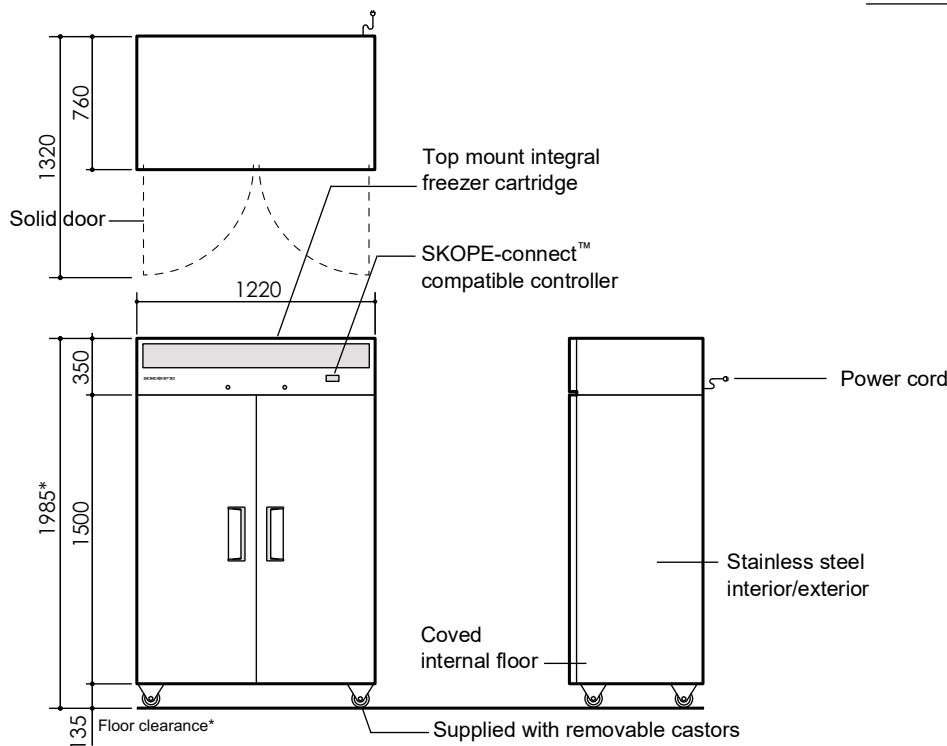

#### CABINET

Doors	2 × self-closing, lockable, solid swing doors, left and right hand
Internal door opening	2 × door openings: 1375 mm high × 495 mm wide
Shelves	10 × adjustable height shelves: 530 mm wide × 530 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

#### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
GEMS class	5L1
GEMS energy consumption	10.64 kWh/24h
GEMS annual running cost	\$1165 p.a. (@ \$0.30/kWh)

#### ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1200 mm, 12W LED light (door activated)
Power cord	Supplied with 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	5.0 amps (includes unit 4.6 amps)

#### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0037)
Refrigerant	R290/105 g (natural refrigerant)
Nominal capacity	725 watts
Heat rejection (Avg/peak)	450 watts/725 watts
Drainage	No plumbing required

#### DIMENSIONS

	External	Internal
Height	1985 mm*	1395 mm
Width	1220 mm	1100 mm
Depth	760 mm	600 mm
Floor area	0.93 m <sup>2</sup>	
Weight	171 kg	
Gross volume	921 L	
Net volume	712 L	

\* With supplied castors fitted. See height variation below

#### Height variation

Supplied castors	1985 mm
Height adjustable legs	1995 to 2035 mm
No castors or legs	1850 mm

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

#### Ventilation requirements

Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

#### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0679 Rev. 1.6 Apr. 2023

