


# specifications

## RF7.UBR.3.SD

ReFlex Series, 3 Solid Door, Underbench Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

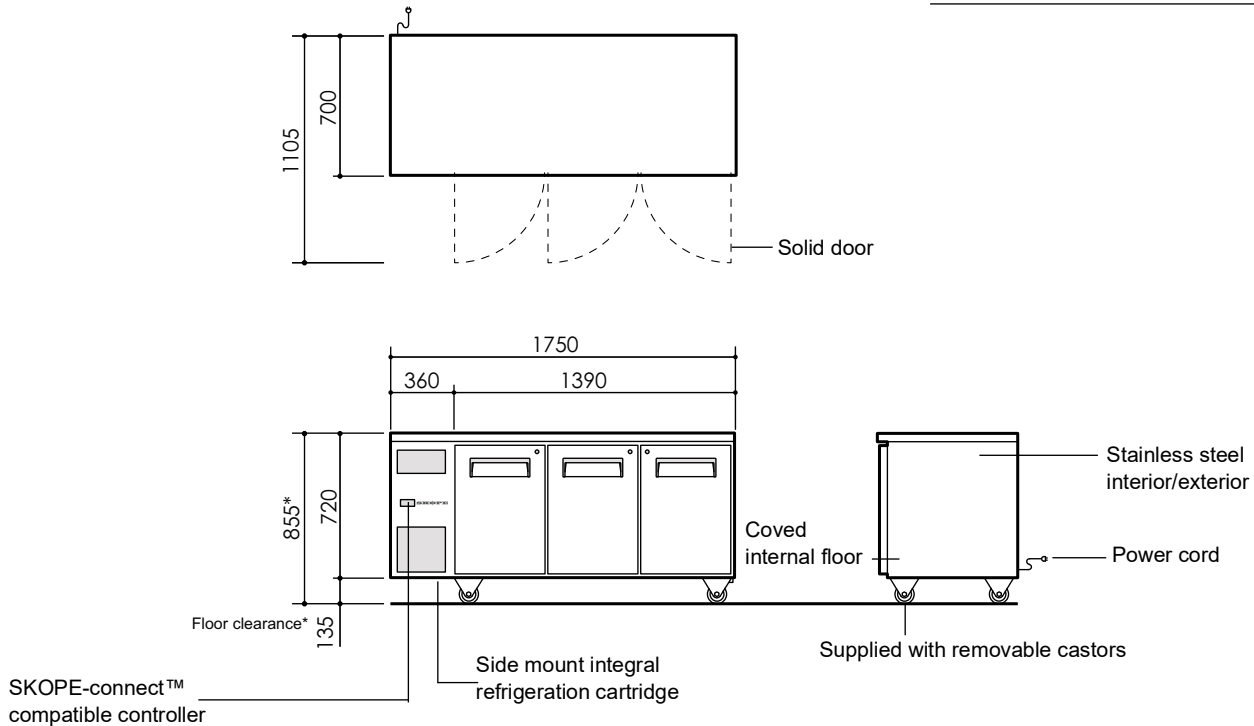

<b>CABINET</b>	
Doors	3 × self-closing, lockable, solid swing doors. LH, LH, RH
Internal door opening	3 × door openings: 560 mm high × 360 mm wide
Shelves	6 × adjustable height shelves: 4 × outside 395 mm wide × 510 mm deep, 2 × middle 455 mm × 510 mm deep Note: Bottom shelves supplied floor mounted, additional shelf clips are available on request.
Worktop	Total thickness 45 mm (0.7 mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
<b>PERFORMANCE</b>	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	5M1
GEMS energy consumption	2.81 kWh/24 h
GEMS annual running cost	\$308 p.a. (@ \$0.30/kWh)
<b>ELECTRICAL</b>	
Electrical safety climate class	5
Interior lighting	2 × 400 mm, 4W LED light (door activated)
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	2.0 amps (includes unit 1.5 amps)
<b>REFRIGERATION</b>	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth wireless technology
Refrigeration system	Side mounted, integral, removable refrigeration cartridge (part number ULKCN1-0022)
Refrigerant	R290/95 g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (avg/peak)	120 watts/135 watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	855 mm*	570 mm
Width	1750 mm	1280 mm
Depth	700 mm	530 mm
Floor area	1.23 m <sup>2</sup>	
Weight	130 kg	
Gross volume	387 L	
Net volume	319 L	

\* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855 mm
Height adjustable legs	865 to 905 mm
No castors or legs	720 mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

PSS0586 Rev. 2.4 Apr. 2023

### SKOPE INDUSTRIES LIMITED

Australia Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

