

## Starline UL

Premium Undercounter Dishwasher/Glasswasher – 500mm rack  
**W 600mm x D 635mm x H 845mm**

The Starline UL is a premium undercounter dishwasher and glasswasher that features our most advanced technologies, including our assured rinse and advanced filtration systems, alongside premium touches such as a soft close door as well as full thermal and acoustic installation to provide an optimal working environment around the machine. The UL's intuitive electronic controls provide Soft Start, EcoPower, custom cycles, chemical adjustability and immediate fault diagnosis. Capable of washing 1,500 glasses or 1,080 plates per hour, the UL is a perfect machine for busy cafes, bars, childcare centres or office kitchens.

This versatile and highly efficient dishwasher combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the UL provides excellent wash results while being light on operating costs and the environment. The UL is also an ideal machine for a high capacity polish-free glasswashing station.

Since 1981 Washtech dishwashers have been constructed in New Zealand from heavy-duty stainless steel, and are engineered specifically for New Zealand conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your UL will not let you down.

### Special Features

- Polish-free glasswashing compatible
- Assured rinse – fitted with break tank and rinse pump for optimal sanitising rinse results even when running on cold and/or low pressure inlet water
- Full thermal and acoustic insulation
- Soft close door
- Hands-free AutoDrain

### Standard Features

- 60, 120 and 180 second cycles
- Capacity of up to 1,080 plates / 1,500 glasses per hour
- Low water consumption of 2.4 litres per cycle
- Compatible with 500mm racks
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including heavy duty scrap tray
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
- EcoPower – reduced temperatures and energy consumption when machine is idle

### Includes:


- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)



### Optional Finishes:

- Mirror Black
- Satin Black

*450+ additional custom colours & textures also available on request. Optional finishes incur additional cost.*



## Starline UL

washtech.co.nz

### Washtech Limited

PO Box 90-548  
Auckland 1142

414 Rosebank Road  
Avondale  
Auckland 1026  
NEW ZEALAND

(09) 829 0930  
info@washtech.co.nz



service@washtech.co.nz

For 24/7 service and support:  
**0800 WASHTECH**

Washtech provides full service and support 24 hours a day, 7 days a week, with a comprehensive nationwide network of authorised service providers.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© 2020 Washtech Limited  
Version: SUL00212007

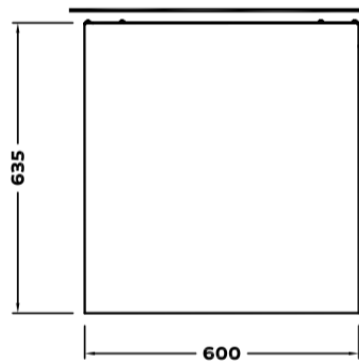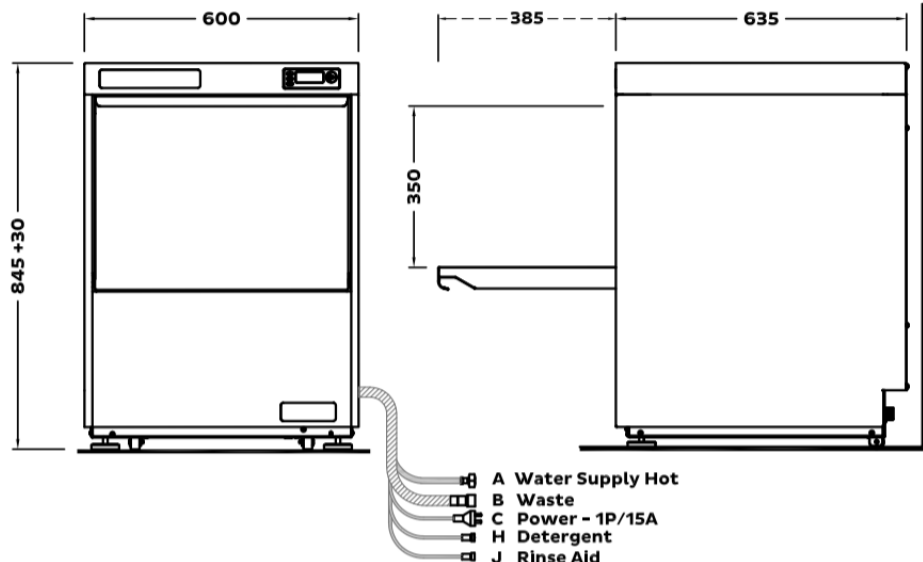

### A - Hot Water\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.4 litres per cycle

### B - Waste - Pumped Drain

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.37
Single Phase	240	50	25	6.37
Three Phase	415	50	15	9.00

### Dimensions

	Machine	Packed
Width (mm)	600	720
Depth (mm)	635	690
Height (mm)	845	970
Weight (kg)	74	92
Volume (m <sup>3</sup> )		0.48

### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

\* Suitable for connection to cold inlet water. To optimize productivity when operating on cold water connect to 1p/25A or 3p/15A.

Refer to operator manual for installation instructions.