

Starline GL

Premium Undercounter Glasswasher/Dishwasher – 400 to 450mm rack
W 535mm x D 560mm x H 835mm

The Starline GL is a premium undercounter glasswasher and light duty dishwasher that features our most advanced technologies, including our assured rinse and advanced filtration systems, alongside premium touches such as a soft close door as well as full thermal and acoustic installation to provide an optimal working environment around the machine. The GL's intuitive electronic controls provide Soft Start, EcoPower, custom cycles, chemical adjustability and immediate fault diagnosis. Capable of washing 960 glasses or 840 plates per hour, the GL is a perfect machine for busy bars, cafes, childcare centres or office kitchens.

This versatile and highly efficient glasswasher combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the GL provides excellent wash results while being light on operating costs and the environment. The GL is also an ideal machine for a polish-free glasswashing station.

Since 1981 Washtech dishwashers have been constructed in New Zealand from heavy-duty stainless steel, and are engineered specifically for New Zealand conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your GL will not let you down.

Special Features

- Polish-free glasswashing compatible
- Assured rinse – fitted with break tank and rinse pump for optimal sanitising rinse results even when running on cold and/or low pressure inlet water
- Full thermal and acoustic insulation
- Soft close door
- Hands-free AutoDrain

Standard Features

- 60, 120 and 180 second cycles
- Capacity of up to 960 glasses / 840 plates per hour
- Low water consumption of 2.4 litres per cycle
- Compatible with 400mm to 450mm racks
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including heavy duty scrap tray
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
- EcoPower – reduced temperatures and energy consumption when machine is idle

Includes:


- 1 x 450mm dish rack (600 70081)
- 1 x 450mm cup rack (600 70080)
- 1 x cutlery container (C660503)
- 1 x rack adapter (213 3000)



Optional Finishes:

- Mirror Black
- Satin Black

450+ additional custom colours & textures also available on request. Optional finishes incur additional cost.



Starline GL

washtech.co.nz

Washtech Limited

PO Box 90-548
Auckland 1142

414 Rosebank Road
Avondale
Auckland 1026
NEW ZEALAND

(09) 829 0930
info@washtech.co.nz


service@washtech.co.nz

For 24/7 service and support:
0800 WASHTECH

Washtech provides full service and support 24 hours a day, 7 days a week, with a comprehensive nationwide network of authorised service providers.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© 2020 Washtech Limited
Version: SGL00212007

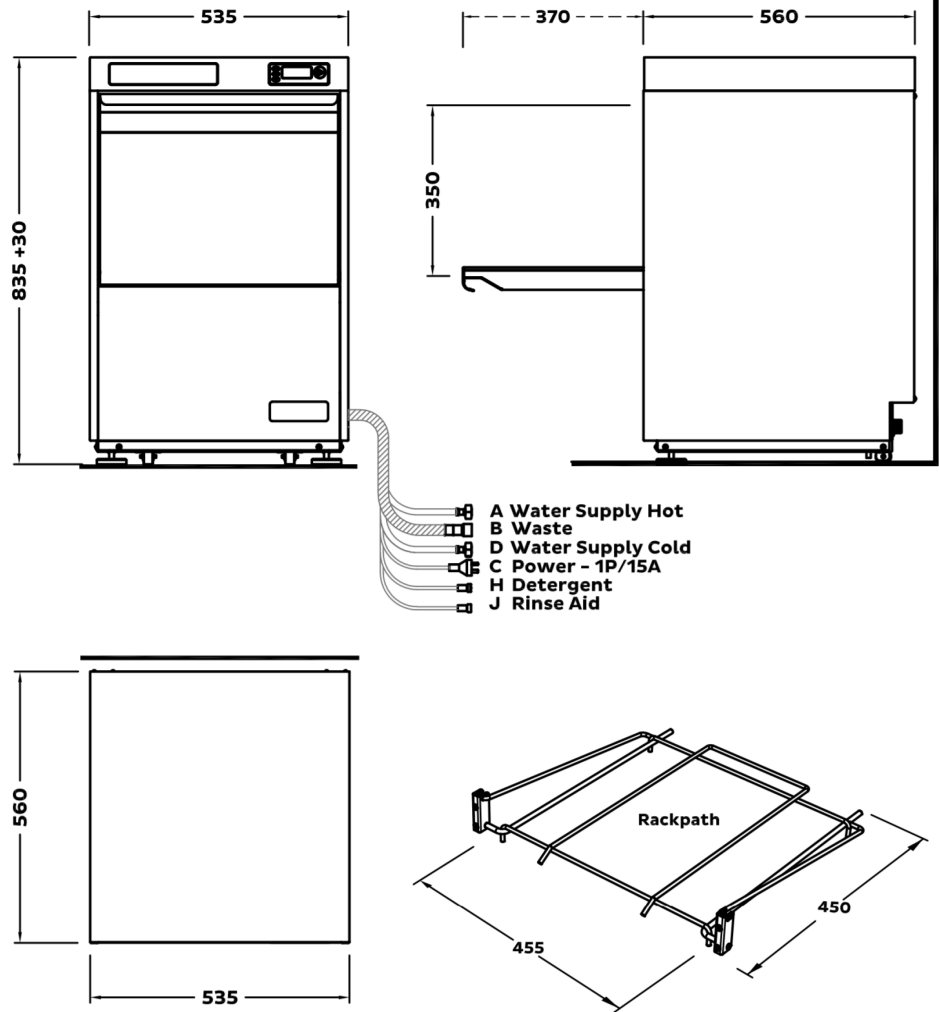

A - Hot Water*

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 100-350kPa
Flow 10 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 2.4 litres per cycle

B - Waste - Pumped Drain

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.15
Single Phase	240	50	25	6.15
Three Phase	415	50	15	9.00

Dimensions

	Machine	Packed
Width (mm)	535	645
Depth (mm)	560	610
Height (mm)	835	970
Weight (kg)	66	77
Volume (m³)		0.40

Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl-		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

* Suitable for connection to cold inlet water. To optimize productivity when operating on cold water connect to 1p/25A or 3p/15A.

Refer to operator manual for installation instructions.